

General Certificate of Education (A-level)
June 2013

Physics A

PHYA2

(Specification 2450)

Unit 2: Mechanics, materials and waves

Final

Mark Scheme

Mark schemes are prepared by the Principal Examiner and considered, together with the relevant questions, by a panel of subject teachers. This mark scheme includes any amendments made at the standardisation events which all examiners participate in and is the scheme which was used by them in this examination. The standardisation process ensures that the mark scheme covers the students' responses to questions and that every examiner understands and applies it in the same correct way. As preparation for standardisation each examiner analyses a number of students' scripts: alternative answers not already covered by the mark scheme are discussed and legislated for. If, after the standardisation process, examiners encounter unusual answers which have not been raised they are required to refer these to the Principal Examiner.

It must be stressed that a mark scheme is a working document, in many cases further developed and expanded on the basis of students' reactions to a particular paper. Assumptions about future mark schemes on the basis of one year's document should be avoided; whilst the guiding principles of assessment remain constant, details will change, depending on the content of a particular examination paper.

Further copies of this Mark Scheme are available from: aga.org.uk

Copyright © 2013 AQA and its licensors. All rights reserved.

Copyright

AQA retains the copyright on all its publications. However, registered schools/colleges for AQA are permitted to copy material from this booklet for their own internal use, with the following important exception: AQA cannot give permission to schools/colleges to photocopy any material that is acknowledged to a third party even for internal use within the centre.

Set and published by the Assessment and Qualifications Alliance.

Question	Part	Sub Part	Marking Guidance	Mark	Comments
1	а	i	1000(N) AND 6000(N) seen OR $F = \sqrt{(1000)^2 + (6000)^2} \checkmark$ allow incorrect values seen = 6083 (N) (= 6100) \checkmark More than 2 sf seen	2	Independent marks Allow full credit for appropriate scale drawing Ignore rounding errors in 3 rd sig fig.
1	а	ii	$tan\Theta = 1000/6000$ or correct use of sin or cos \checkmark $\Theta = 9.5 (9.46^\circ) \checkmark$ Allow range $9.4 - 10.4$	2	Use of cos yields 10.4 Allow use of 6100 Some working required for 2 marks. Max 1 mark for correct calculation of vertical angle (range 79.6 – 80.6) some working must be seen
1	а	iii	$(m = W/g =) 6500 / 9.81 (= 662.6 \text{ kg}) \checkmark$ (a = F/m = 6083 / 662.6) $= 9.2 \text{ (ms}^{-2}) \checkmark (9.180)$	2	Use of weight rather than mass gets zero Correct answer on its own gets 2 marks Penalise use of g=10 in this question part only (max 1)
1	b	i	= 6500 × 600 ✓ (662.6 x 9.81 x 600) = 3 900 000 ✓ (J)	2	Look out for $W \times g \times h$ which gives 39000000 (gets zero) Correct answer on its own gets 2 marks Do not allow use of 1/2mv ² (= 39 000)


1	b	ii	(E= Pt =) $320\ 000 \times 55$ (= 17 600 k J) OR P= 1(b)(i) / 55 (7.09x10 ⁴) \checkmark 3.9 / 17.6 OR 70.9 / 320 OR = 0.22(16) \checkmark ecf from first line conversion to a percentage (= 22 %) \checkmark	3	Some valid working required for 3 marks Look out for physics error: Power/time (320/55) then use of inverted efficiency equation yielding correct answer Do not allow percentages >= 100% for third mark
2	а	i	$(s = \frac{1}{2}gt^{2})$ $1.5 = \frac{1}{2}9.81t^{2} \text{ OR } t = \sqrt{\frac{2s}{g}} \text{ OR } t = \sqrt{\frac{2\times1.5}{9.81}} \checkmark$ $(= 0.553) = 0.55 \text{ (s) } \checkmark$	2	Allow g=10 (0.5477) 0.6 gets 2 marks only if working shown. 0.6 on its own gets 1 mark.
2	а	ii	$(s = v t = 430 \times 0.553 = 237.8 =)$ 240 (m) \checkmark ecf a(i)	1	
2	b		their vertical motion is independent of their horizontal motion OR downward /vertical acceleration is the same for both OR acceleration due to gravity is the same for both OR vertical speed/velocity is the same for both (bullets A and B will be in the air) for the same time \checkmark (Horizontal acceleration is zero and thus horizontal) distance is proportional to horizontal speed OR $s = ut$ where u is the horizontal velocity \checkmark	3	Allow 'time is constant' Don't allow 'similar' 'velocity smaller so distance smaller' is not sufficient

3	а		vol = $\frac{4}{3}\pi 0.011^3$ = (5.5753) 5.6×10 ⁻⁶ (m ³) \checkmark ($m = \rho V$) (= 8100 × 5.575×10 ⁻⁶ =) 0.045 (kg) \checkmark ecf from first part candidate's mass x g (W = 0.045160 × 9.81 = 0.44302 = 0.44 N) \checkmark any 2sf \checkmark	4	Allow use of g = 10 0.36kg , 3.5N from use of diameter rather than radius (max 3 from 4)
3	b	i	The candidate's writing should be legible and the spelling, punctuation and grammar should be sufficiently accurate for the meaning to be clear. The candidate's answer will be assessed holistically. The answer will be assigned to one of three levels according to the following criteria. High Level (Good to excellent): 5 or 6 marks The information conveyed by the answer is clearly organised, logical and coherent, using appropriate specialist vocabulary correctly. The form and style of writing is appropriate to answer the question. Mentions all of the following: • velocity (or speed) increases and then becomes constant (terminal velocity) • acceleration reduces to zero • forces become equal / balanced • weight (allow 'gravity') and drag/friction correctly identified	5-6	

|--|

		T
acceleration = gradient		
 acceleration is maximum (9.81) at the beginning 		
 Forces weight greater than drag (before terminal velocity) there is a resultant force downwards (before terminal velocity) forces become equal/ balanced / drag = weight 		
 drag force increases with speed. Resultant force = W - drag 		
		Poor QWC may result in award of the lower mark within a band.
Low Level (Poor to limited): 1 or 2 marks The information conveyed by the answer is poorly		mark within a band.
organised and may not be relevant or coherent. There is little correct use of specialist vocabulary. The form and	1-2	Max 3 for mention of deceleration or
style of writing may be only partly appropriate.		increasing acceleration
One valid point from list below		
For two marks: Two valid points		
The explanation expected in a competent answer should include a coherent selection of the following points concerning the physical principles involved and their consequences in this case.		Several serious misconceptions may reduce a 2 mark answer to 1
Mention of the points below may influence the mark given within each category:		
 velocity increases velocity becomes constant (terminal velocity) acceleration is maximum (9.81) at the beginning acceleration decreases (to zero) weight greater than drag (before terminal velocity) 		

 there is a resultant force downwards (before terminal velocity) 	
 forces become equal/ balanced / drag = weight 	
 drag force increases with speed. 	
 resultant force = W - drag 	
 acceleration = gradient 	
valid point explaining why rapid decrease in velocity	
occurs when ball hits bottom of container. E.g. resultant	
upward force (decelerates the ball)	

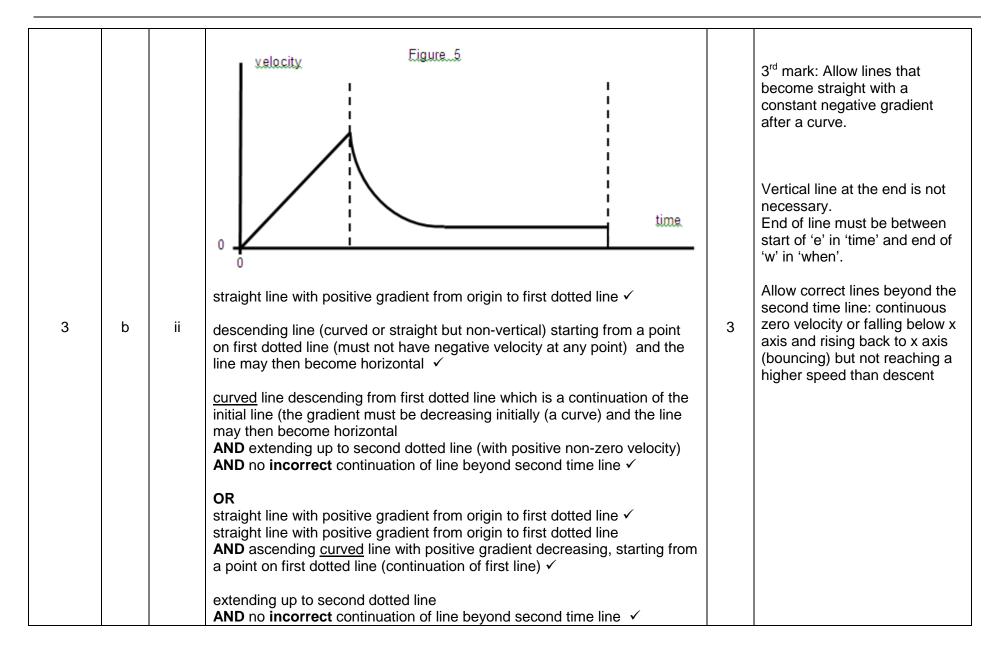

4	а	Force proportional to extension ✓ up to the limit of proportionality (accept elastic limit) ✓ dependent upon award of first mark	2	Symbols must be defined Accept word equation allow ' $F=k\Delta L$ (or $F \propto \Delta L$) up to the limit of proportionality' for the second mark only allow stress \propto strain up to the limit of proportionality' for the second mark only
4	b	Gradient clearly attempted / use of $k=F/\Delta L\checkmark$ correct values used to calculate gradient with appropriate 2sf answer given (1100 or 1200) OR $\underline{1154 \pm 6}$ seen AND $\underline{\text{load used}} >= \underline{15} \checkmark (= 1100 \text{ or } 1200 \text{ (2sf)})$ Nm ⁻¹ / N/m (newtons per metre) \checkmark (not n/m, n/M, N/M)	3	 k = 30/0.026 = 1154 or 31/0.027 = 1148 1100 or 1200 with no other working gets 1 out of 2 Do not allow 32/0.0280 or 33/0.0290 (point A) for second mark. 32/0.028 is outside tolerance. 32/0.0277 is just inside.
		any area calculated or link an area with area / was of		
4	С	 any area calculated or link energy with area / use of 1/2 FΔL ✓ 35 whole squares, 16 part gives 43 ± 1.0 OR equivalent correct method to find whole area ✓ 0.025 Nm per (1cm) square x candidates number of squares and correctly evaluated OR (= 1.075) = 1.1 (J) (1.05 to 1.10 if not rounded) ✓ 	3	(or 0.001 Nm for little squares)

4	d	permanent deformation / permanent extension ✓	1	Allow: 'doesn't return to original length'; correct reference to 'yield' e.g. allow 'extension beyond the yield point' do not accept: 'does not obey Hooke's law' or 'ceases to obey Hooke's law',
4	e	any line from B to a point on the x axis from 0.005 to 0.020 ✓ straight line from B to x axis (and no further) that reaches x axis for 0.010<=∆L<= 0.014 ✓	2	
4	f	work done by spring < work done by the load	1	Accept 'less work' or 'it is less' (we assume they are referring to the work done by spring)
5	а	$n_1 > n_2$ \checkmark (incident) angle > critical angle (allow θ_c not 'c') OR critical angle must be exceeded \checkmark	2	Allow correct reference to 'optical density' Allow $n_A>n_B$ Do not allow: 'angle passes the critical angle'
5	b	$(n_S = \frac{c}{c_S})$ $(c_A = \frac{c}{n_A} =) = \frac{3.00 \times 10^8}{1.80} \checkmark$ $(= 1.667 \times 10^8) = 1.67 \times 10^8 \text{ (ms}^{-1}) \checkmark$	2	For second mark, don't allow 1.6×10 ⁸ Allow 1.66 ×10 ⁸ or 1.70 ×10 ⁸ Allow 1.6 x 10 ⁸

5	С		$\sin 72 = 1.80 \sin \theta$ ($\sin \theta = \frac{\sin 72}{1.80} = \frac{0.9510565}{1.8} = 0.52836$) $\theta = 31.895 = 31.9$ correct answer >= 2sf seen \checkmark	2	Correct answer on its own gets both marks Do not allow 31 for second mark Allow 31.8 - 32
5	d		1.80 $\sin \theta_c = 1.40$ OR $\sin \theta_c = \frac{1.40}{1.80}$ $\theta_c = 51.058 = 51.1$ ° \checkmark (accept 51)	2	Correct answer on its own gets both marks Don't accept 50 by itself
5	е	i	22 + their 5(c) (22+31.9 = 53.9) \checkmark 53.9 > (51.1) critical angle \checkmark OR 5c + 22 < their 5d (θ_c) \checkmark ecf from (c) and (d) angle less than critical angle \checkmark	2	If 5c+22 > 5d then TIR expected If 5c+22 < 5d then REFRACTION expected Allow max 1 for 'TIR because angle > critical angle' only if their 5d >5c +22
5	е	ii	TIR angle correct ✓ ecf from e(i) for refraction answer	1	Tolerance: horizontal line from normal on the right/ horizontal line from top of lower arrow. If 5ei not answered then ecf 5(d). If 5ei and 5d not answered then ecf 5c
6	а	i	$\pi/2$ (radians) or 90 (degrees) \checkmark	1	No path differences Penalise contradictions No fractions of a cycle

6	а	ii	$3\pi/2$ (rad) or 270 (degrees) \checkmark	1	No path differences Penalise contradictions No fractions of a cycle
6	b		(oscillation or motion) perpendicular to direction of wave (travel /velocity/energy transfer) ✓ (oscillates from equilibrium to maximum positive displacement, back to equilibrium, then to max negative displacement) and back to equilibrium /starting position /rest position ✓	2	do not allow 'up and down' for first mark allow 'up and down', or 'down then up', 'side to side', 'rise and fall' in place of oscillates Allow 'rest position', 'starting position', 'middle', 'centre line' ref to nodes/antinodes not allowed for 2 nd mark
6	С		(the wave is) <u>transverse</u> OR <u>not longitudinal</u> ✓ <u>only transverse</u> can be polarised OR longitudinal waves cannot be polarised OR oscillations are in one <u>plane</u> ✓	2	accept it is an S wave or secondary wave
6	d	i	number of waves/complete cycles/wavelengths (passing a point/produced) per second ✓	1	or 'unit time' allow: (number of) oscillations/vibrations/cycles per second allow <i>f</i> =1/ <i>T</i> only if <i>T</i> is correctly defined do not allow references to f=c/λ
6	d	ii	$(v = f/\lambda \lambda = v/f =) \ 4.5 \times 10^3 / 6.0 \checkmark$ = 750 (m) \checkmark	2	correct answer only gets 2 marks

7	а	single frequency (or wavelength or <u>photon</u> energy) ✓	1	not single colour accept 'very narrow band of frequencies'
7	b	subsidiary maxima (centre of) peaks further away from centre ✓ subsidiary maxima peaks further away from centre AND central maximum twice width of subsidiaries AND symmetrical ✓	2	For second mark: One square tolerance horizontally. One whole subsid max seen on either side. Central higher than subsid and subsid same height +/- 2 squares. Minima on the x axis +/- 1 square. Must see 1 whole subsidiary for second mark
7	С	ONE FROM: • don't shine towards a person • avoid (accidental) reflections • wear laser safety goggles • 'laser on' warning light outside room • Stand behind laser • other sensible suggestion ✓ • eye / skin damage could occur ✓	2	allow green goggles for red laser, 'high intensity goggles', etc. not 'goggles', 'sunglasses'

	3 from 4 ✓✓✓	allow 'white in middle'
7 d	 central white (fringe) each/every/all subsidiary maxima are composed of a spectrum (clearly stated or implied) each/every/all subsidiary maxima are composed of a spectrum (clearly stated or implied) AND (subsidiary maxima) have violet (allow blue) nearest central maximum OR red furthest from center Fringe spacing less / maxima are wider / dark fringes are smaller (or not present) 	For second mark do not allow 'there are colours' or 'there is a spectrum' on their own Allow 'rainbow pattern' instead of spectrum but not 'a rainbow' If they get the first, the second and third are easier to award Allow full credit for annotated sketch